




Series
HM35

Precision Digital Pressure Manometer

Up to 0.05% Accuracy, Graphical Display, Data Logging Capability

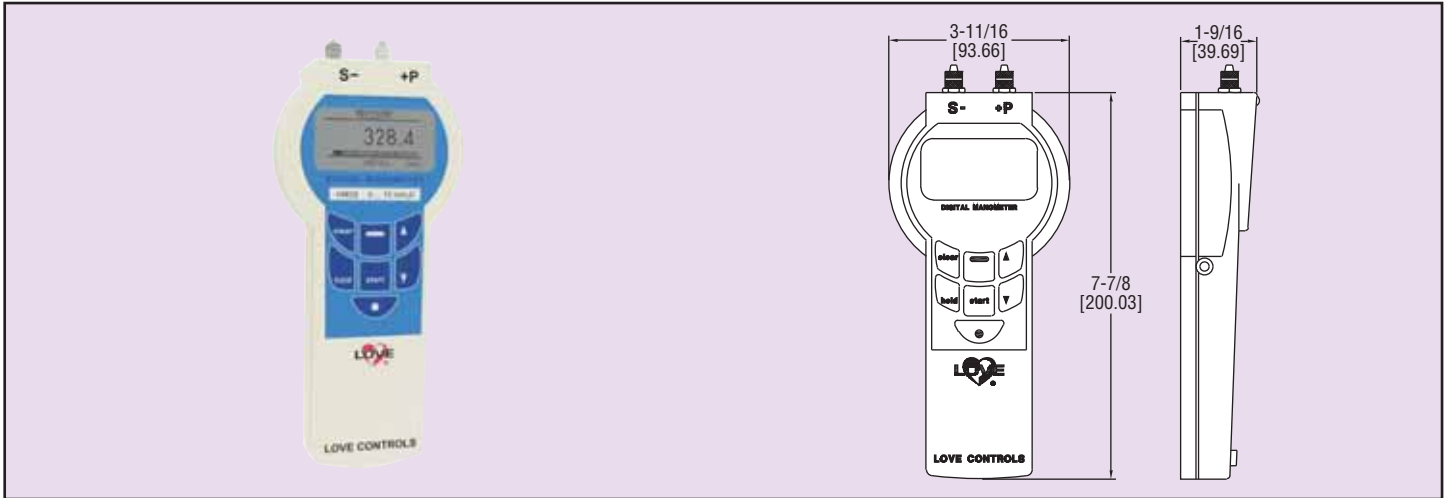

TEST EQUIPMENT

The High Precision Series HM35 Digital Manometer is designed to reliably measure and log pressure measurements for critical applications. This family of manometer can measure absolute pressure, differential pressure or gauge pressure with up to 0.05% accuracy. The data logging function can store up to 10,742 readings and transmit the readings to a PC through an IR serial port. The large display can graphically display trends in the data as well as peaks and valleys. The series HM35 comes standard with a calibration certificate so that the instrument can be used as a secondary calibration standard when testing other pressure instrumentation. This manometer is ideal for laboratories, calibration facilities, and other critical pressure applications.

ACCESSORIES

- HM28-0, 1/8" NPT Adapter (1 Piece)
- HM35-1, Communication software and cable
- HM35-2, Infrared RS-232 Serial Adapter
- HM35-3, External Power Adapter

SPECIFICATIONS

Pressure Connections: Hose 4/6 mm or 1/8" NPT.

Accuracy: (Includes linearity, hysteresis, and repeatability): Depending on model.

- ±0.20% full scale ±1 digit
- ±0.10% full scale ±1 digit
- ±0.05% full scale ±1 digit

Measuring Media: Instrument air or inert gases that are compatible with 18/8 stainless steel.

Temperature Limits: 32 to 122°F (0 to 50°C).

Storage Temperature: -4 to 140°F (-20 to 60°C).

Humidity: Maximum 95% RH non-condensing.

Display: Graphical back lit LCD. 128 x 64 points.

Power Requirements: 3 x 1.5 VDC Mignon - Cell AA batteries (included). Can operate on 6 to 9 VDC external power.

Current Consumption: 25 mA without back lit display, IR, or buzzer.

Memory: 10,742 readings. Recording intervals adjustable from 1 second to 24 hours or manual.

Case Protection: IP54.

Weight: 10.5 oz (300 g).

Agency Approvals: CE.

Error Limit 0.2% F.S. for gauge, vacuum, and differential pressure

Model	Range	Over Pressure
HM3531DLB300	0-10 in w.c. (0-2.5 kPa)	50 in w.c.
HM3531DLC300	0-28 in w.c. (0-7 kPa)	140 in w.c.
HM3531DLE300	0-80 in w.c. (0-20 kPa)	600 in w.c.
HM3531DLF300	0-120 in w.c. (0-30 kPa)	600 in w.c.
HM3531DLG300	0-200 in w.c. (0-50 kPa)	58 psi
HM3531DLH300	0-14.5 psi (0-100 kPa)	58 psi
HM3531DLJ300	0-29 psi (0-200 kPa)	100 psi
HM3531DLK300	0-108 psi (0-750 kPa)	245 psi
HM3531DLL310	0-145 psi (0-1000 kPa)	390 psi
HM3531DLM310	0-245 psi (0-1700 kPa)	390 psi

For higher accuracy models change the 10th digit from a 3 to a 1 (0.05% F.S.), 2 (0.1% F.S.), or 6 (0.1% of reading). For example, 0 to 28 in of w.c. with 0.05% accuracy would be model number HM3531DLC100. Higher accuracies are only available on 0-28 in of w.c. range or higher.

Manometers,
Portable